

HIGH SPIN WASHERS EXTRACTORS

WED 11 ET2
WED 14 ET2
WED 18 ET2



EASY TOUCH 2

- User friendly and fully programmable 7" screen,
- USB connection. PC software free of charge for programming, traceability, data analysis...
- Videos on display (ads, instructions...),
- 37 available languages,
- 8 dosing signals as standard.



EFFICIENCY

- Intelligent weighing system,
- Low water consumption,
- Optimal loading: water and chemicals adapted to the load,
- Water recovery tanks ready with AQUABAC.



G FORCE

- **High G factor 450:**
Reduced residual moisture and drying time.



VERSATILITY

- MAKE TO ORDER: possibility to customize,
- OPL <> COIN: standard model easily transformable.
- ELECTRIC <> HOT WATER
- DRAIN VALVE <> PUMP
- WET CLEANING features as standard.



ERGONOMICS

- Big aluminium loading door (ø 373 mm 11 & 14 kg models, ø 460 mm 18 kg models),
- Easy opening / closing system for door lock.



CONNECTIVITY

- Remote communication ready as standard,
- Remote payment,
- Management of OPL and COIN-OP laundries.



EASY MAINTENANCE

- Hinged panel: easy access to parts,
- Same parts for all models: contactors, electronic devices, gear...
- Technical menu: statistics, alarms, traceability...



OTHERS

- Grey skinplate outer casing,
- Drum and vat in AISI 304 stainless steel,
- Free standing: no need to be anchored to the floor,
- 3 water inlets,
- Detergent dispenser with 4 compartments,
- LOADING AID feature: water and rotation control,
- Imbalance electronic control with frequency inverter.




OPTIONS

- Double drain kit for water recovery (14 & 18 kg models)
- Levelling feet.
- Drain pump kit (11 & 14 kg models).
- Aqua Flow kit for water recycle.
- Plinth for loading height 850 mm from door bottom.
- Plinth for having same height in washers (self-service).
- Relay card with 6 extra dosing signals: total of 14 signals.
- Automatic Weighing System : weighing sensor system on feet (includes 6 extra dosing signals kit).
- Steam kit to transform an electric or hot water heated machine into steam version.
- Body or front panel in AISI 304 stainless steel.
- Door silicone gasket (11 & 14 kg models).
- Printer
- Danube Online communication kit.
- "NC" normally closed drain valve.
- Self-service kits: coin or token meter + coin/token box, central pay
- Automatic door unlock device in case of power outage.
- Reversing door opening.
- Tropicalized model
- Ship voltage for electric models: 440V III 50/60 Hz no neutral.

TECHNICAL DATA	UNIT.	WED11 ET2	WED14 ET2	WED18 ET2						
DRUM										
Load capacity 1:9 / 1:10	Kg	11/10	14/13	20/18						
Volume	l	100	130	180						
Diameter	mm	532	620	700						
Depth	mm	425	430	470						
GENERAL DETAILS										
Washing speed / Spining speed	r.p.m.	50/ 1.231	50/ 1.138	47/ 1.071						
G Factor	-	450	450	450						
Maximum force transmitted	KN	2,08 ±0,75	2,49 ±1,05	3,41 ±1,4						
Frequency-dynamic force	Hz	16,7	16,7	16						
Sound level	dB	<70	<70	<70						
Self-service version	-	Yes	Yes	Yes						
Double drain	-	No	Opt	Opt						
Weighing System / Tilting System	-	Opt/No	Opt/No	Opt/No						
DOOR										
Height center door / Height door	mm	630/370	700/440	765/450						
Diameter	mm	373	373	460						
POWER										
Motor	kW	0,75	1,1	2,2						
Heating (Electric model)	kW	6	9	12						
Max. power (Electric model)	kW	6,25	9,4	12,75						
Max. power (steam and hot water)	kW	0,75	1,1	2,2						
CONNECTIONS										
		ELECTRICAL	STEAM / HOT WATER	ELECTRICAL	STEAM / HOT WATER	ELECTRICAL	STEAM / HOT WATER			
Tension 230V - I + N + T	Nº x mm2 / A	3 x 4 / 32A	3 x 1,5 / 6A	3 x 10 / 50A	3 x 1,5 / 10A	3 x 16 / 63A	3 x 1,5 / 10A			
Tension 230V - III + T	Nº x mm2 / A	3 x 2,5 / 20A	-	3 x 4 / 25A	-	3 x 6 / 40A	-			
Tension 400V - III + N + T	Nº x mm2 / A	3 x 1,5 / 10A	-	3 x 1,5 / 16A	-	3 x 2,5 / 20A	-			
Steam inlet (Steam mod.)	inch	1/2"		1/2"		1/2"				
Maximum steam consumption (Steam mod.)	Kg/h	7		8,5		12				
Water inlet	inch	3/4"		3/4"		3/4"				
Water main pressure	Kgs/cm ²	2-4		2-4		2-4				
Maximum water consumption*	Lit/h	71,4*		88,8*		118,3*				
Drain	mm/inch	3"		3"		3"				
Drainage capacity	Lit/min	200		200		200				
DIMENSIONS / PACKING DIMENSIONS										
Width / Width	mm	692/750			788/830			884/930		
Depth / Depth	mm	788/1.000			869/1.010			913/1.030		
Height / Height	mm	1.185/1.417			1.307/1.560			1.415/1.700		
Net weight / Gross weight	kg	230/239			250/283			360/393		

* N°20 Program, 75% load

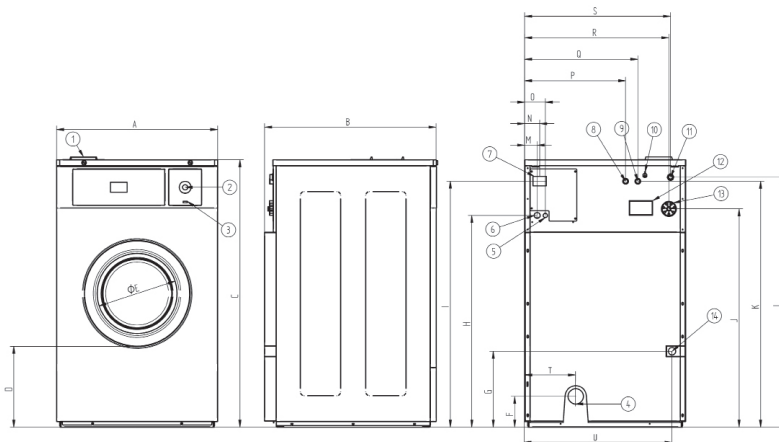

01. Soap dispenser
02. Emergency stop
03. Usb port
04. Drain
05. Electric connection to liquid soap pumps
06. Electrical connection
07. Main switch
08. Auxiliar water inlet
09. Hot water inlet
10. Ground connection
11. Cold water inlet
12. Blur output / water overload
13. Liquid soap connection
14. Steam connection

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U
WED11	692	788	1.185	370	373	93	355	886	1.055	940	1.053	1.073	61	74	101	413	468	610	623	252	626
WED14	788	869	1.307	440	373	130	385	1.035	1.203	1.067	1.202	1.222	61	74	101	494	554	706	714	243	718
WED18	884	913	1.415	450	460	99	390	1.143	1.207	1.166	1.331	1.331	61	74	101	437	517	769	810	355	833