


werkbreedte  
largeur de travail  
working width  
Arbeitsbreite

A	B	C
1750	1880	2910
2000	2130	3160
2200	2330	3360
2500	2630	3660
3000	3130	4160
3300	3430	4460

DETAIL

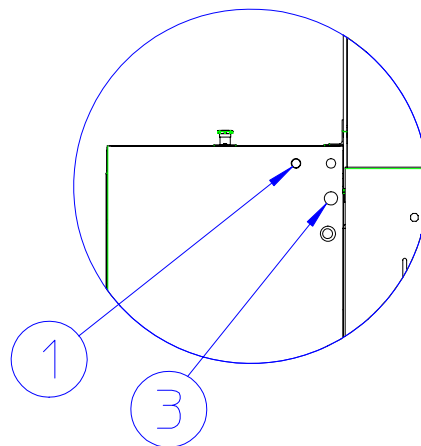

D800 G		052.900.0006A
Rolsnelheid Vitesse repassage	4 - 12m/min *16m/min	Mangelgeschwindigkeit Ironsing speed
Rol aandrijfmotor Moteur entrainement	2.2kw - 1500 rpm *4kw - 1500 rpm	Walzenantriebmotor Roll drive motor
Rol afzuigmotor Moteur aspiration	0.75kw - 3000 rpm	Absaugmotor Exhaust motor
Motor circulatiepomp Motor pompe de clrc.	3kw - 3000 rpm	Umwalzpumpenmotor Circulation pump motor
Motor hydr. pomp Moter pompe hydr.	0.37kw - 1500 rpm	Motor hydr. Pompe Moter hydr. pump
Verwarming Chauffage	D800/1750 : 93kW D800/2000 : 93kW D800/2200 : 93kW D800/2500 : 116kW D800/3000 : 140kW D800/3300 : 140kW	Heizung Heating

1	Elektrische aansluiting Connection électrique Strom Anschluss Electrical connection	230V : 3 x 16mm <sup>2</sup> + PE (80A) 400V : 3 x 10mm <sup>2</sup> + N + PE (40A)
2	Afzuiging dampen Sortie buées Wrasenausgang Vapour outlet	Ø125
3	Gasinlaat Entrée gaz Gasanschluss Gas inlet	Min. 20mBar 3/4"
4	Gasuitlaat Sortie gaz Gasausgang Gas outlet	Ø125